



GRAB LOOP,
12 mm ROPE KNOTTED
ON THE UNDERSIDE

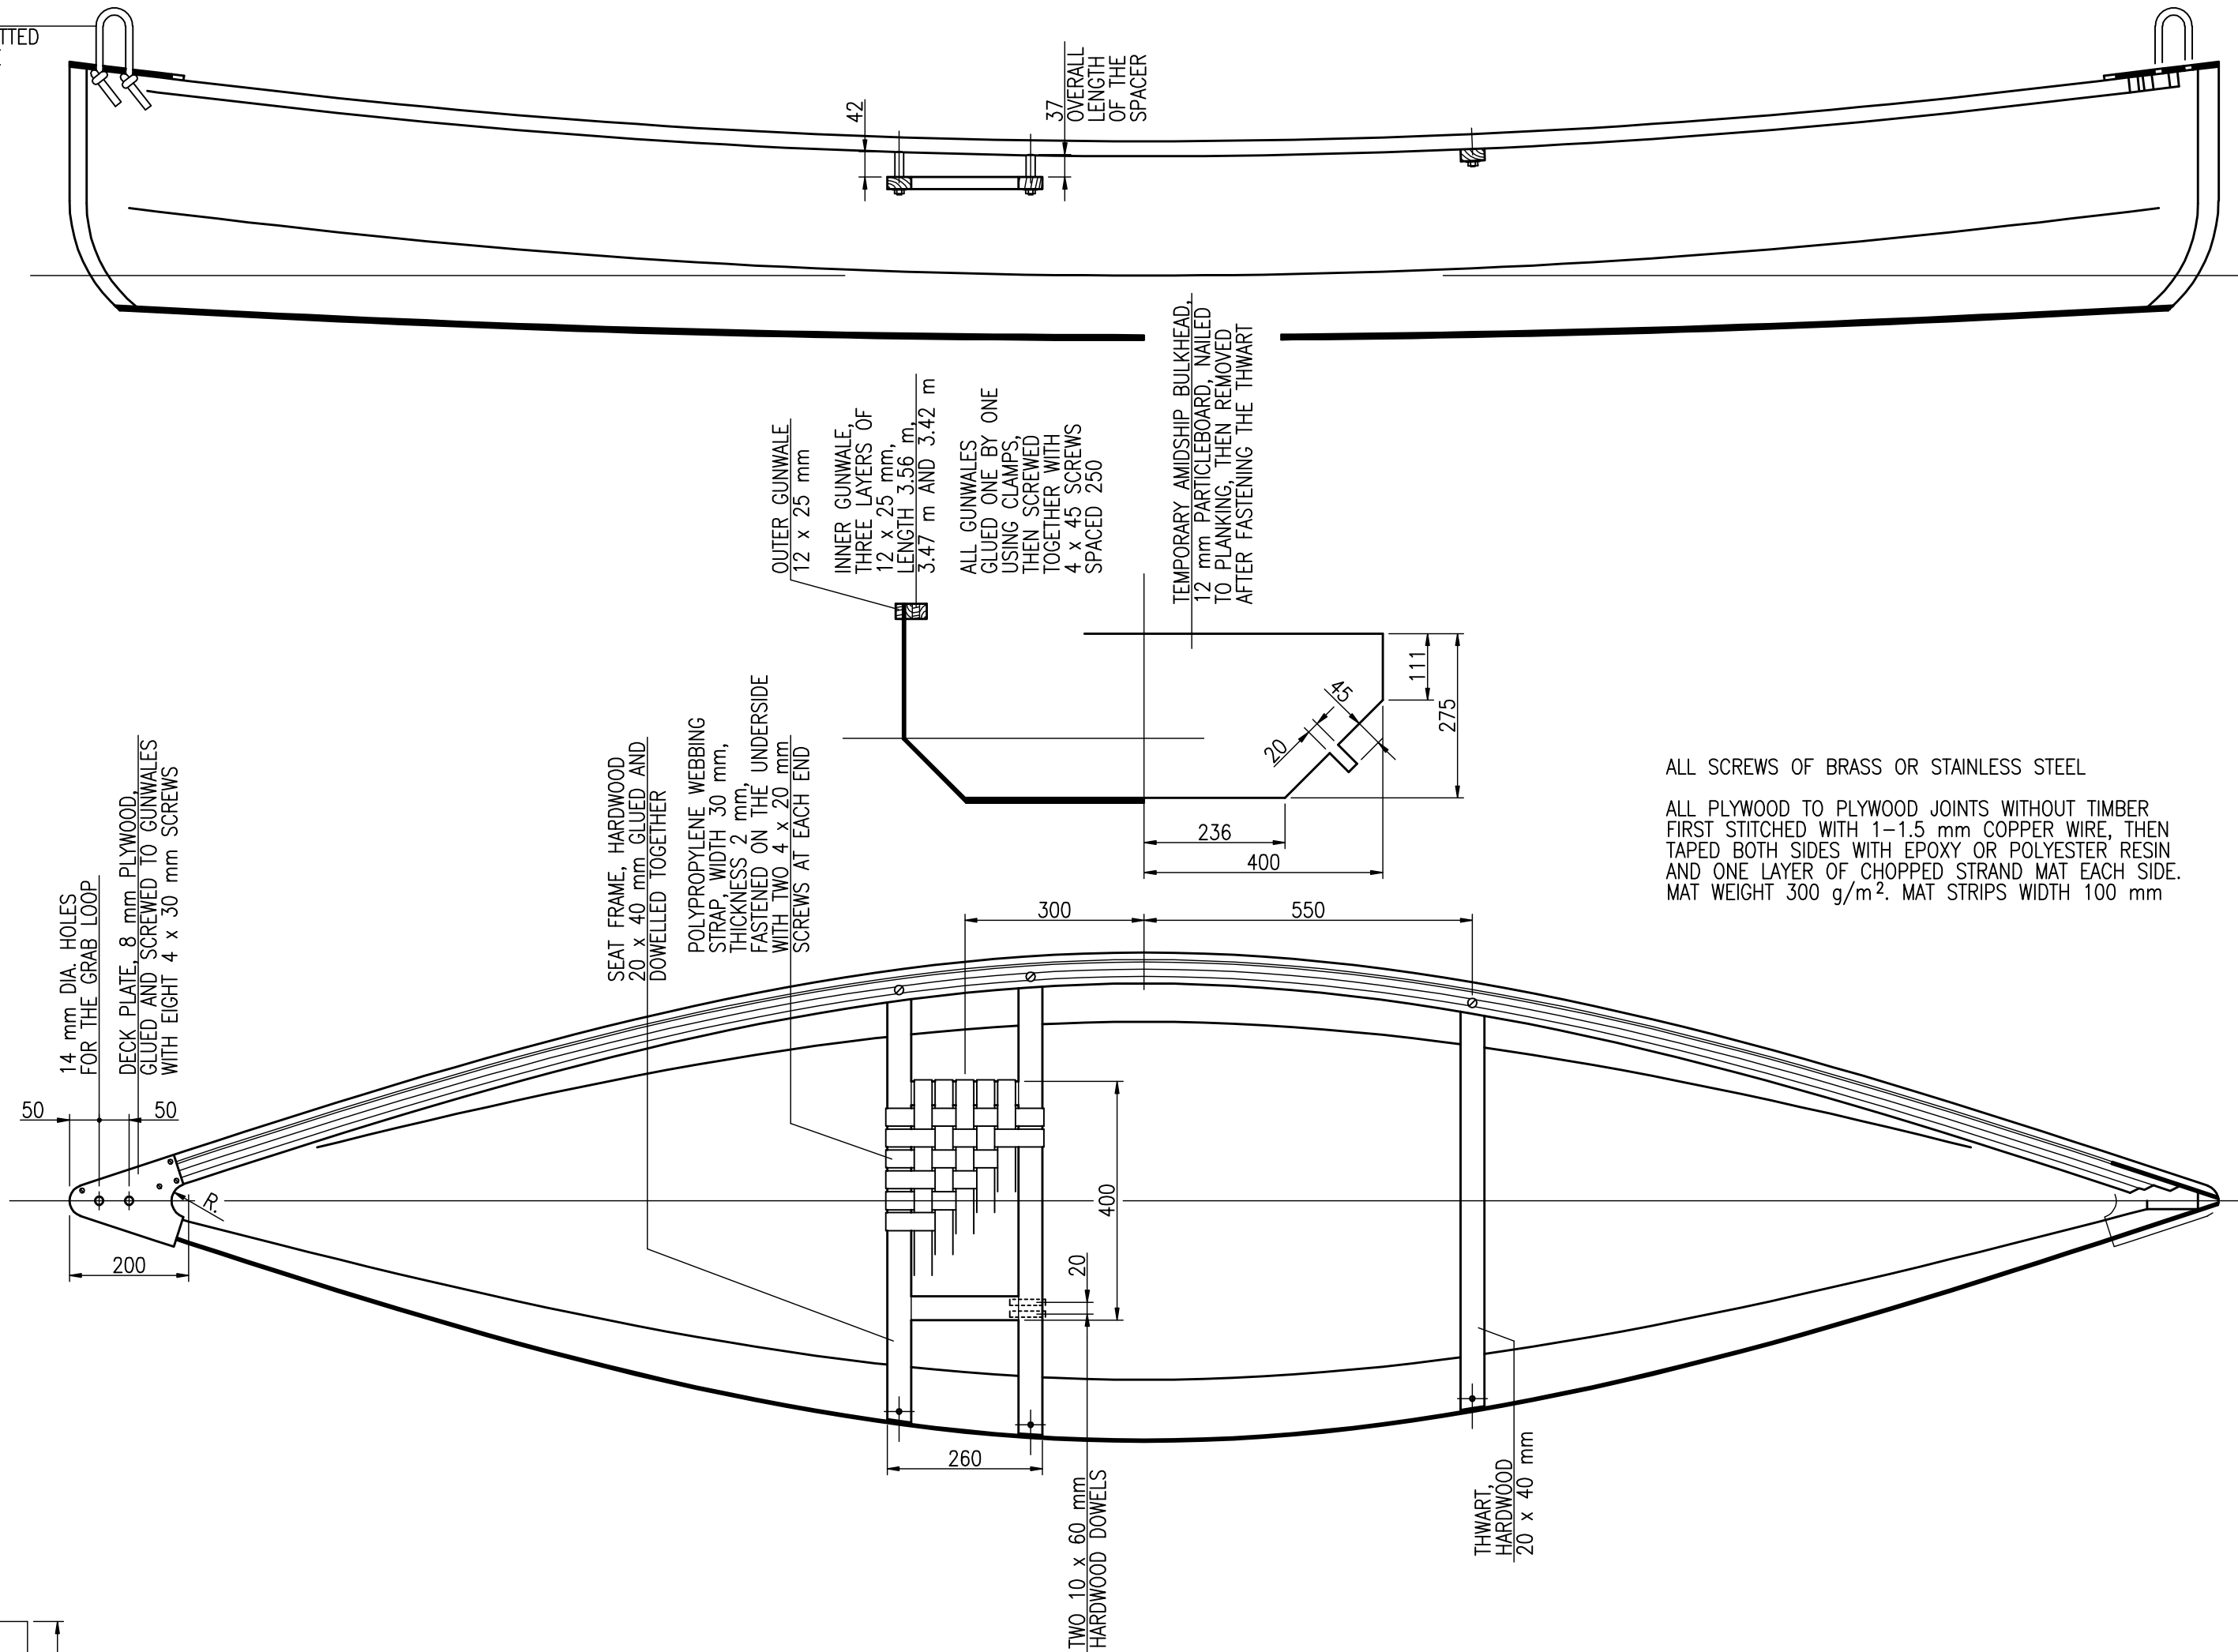

BOW AND STERN STEM,
THREE LAYERS OF 4 mm
AND TWO LAYERS OF 8 mm
PLYWOOD, GLUED AND
STITCHED TO PLANKING
WITH A COPPER WIRE
SPACED 30 mm AT CHINES
AND 50 mm AT SIDES, THEN
TAPED OUTSIDE ONLY WITH
RESIN AND MAT

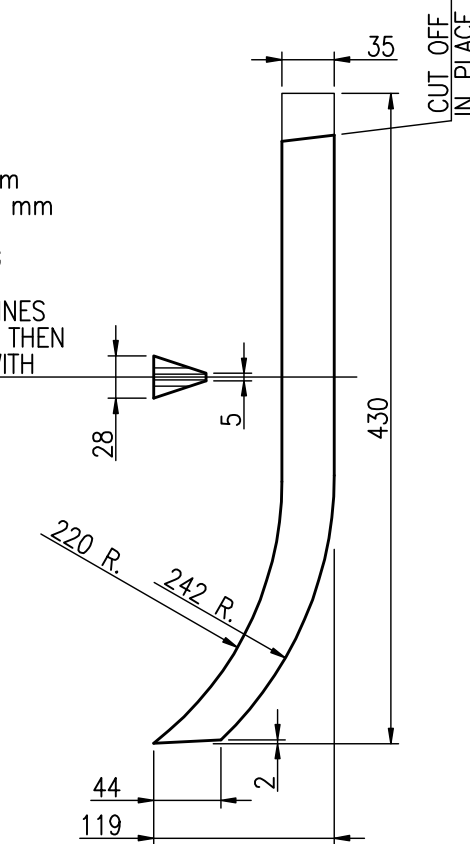

MAIN DIMENSIONS



LENGTH OVERALL	L _{OA}	3.60 m
BEAM	B	0.80 m
DRAFT	T _C	0.10 m
DEPTH AMIDSHIP	H	0.325 m
DEPTH AFT/FORWARD	H _A H _F	0.45 m
VOLUME DISPLACEMENT	∇	0.14 m ³
PRISMATIC COEFFICIENT	C _P	0.55

3.6m

HULL CONSTRUCTION
SHEET 36.2/2, SIZE A2
SCALE 1:1, 1:5, 1:10, 1:20

RADOSŁAW WERSZKO
AUGUST 2017

SEAT SPACER

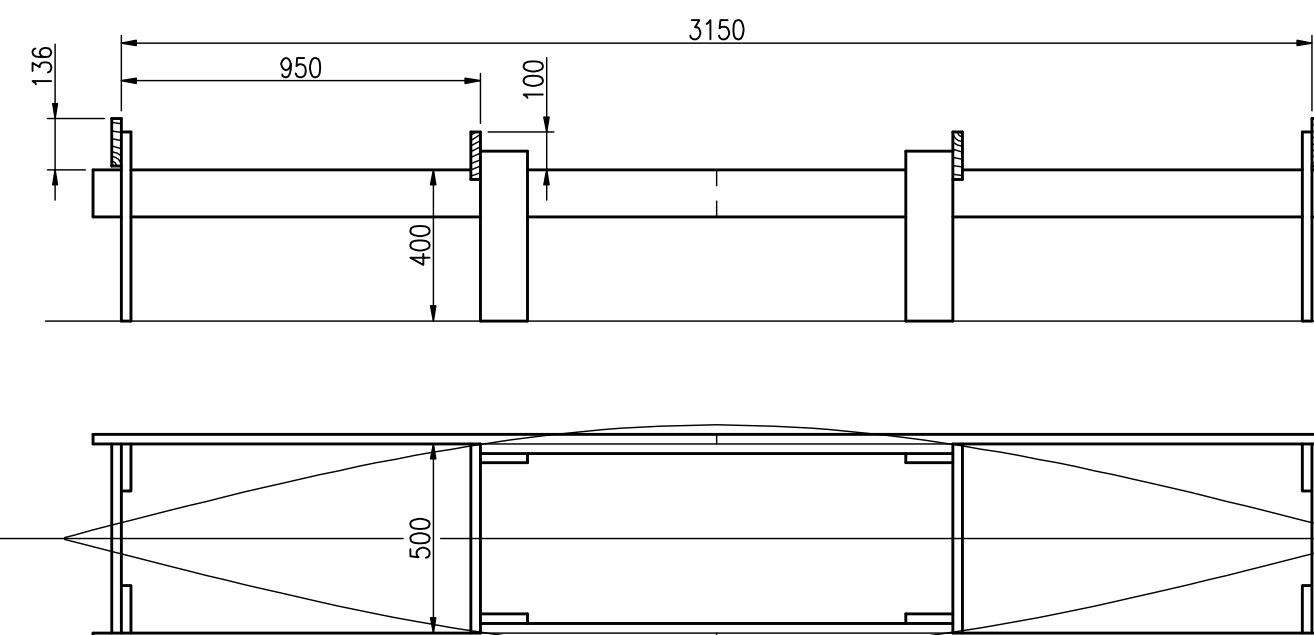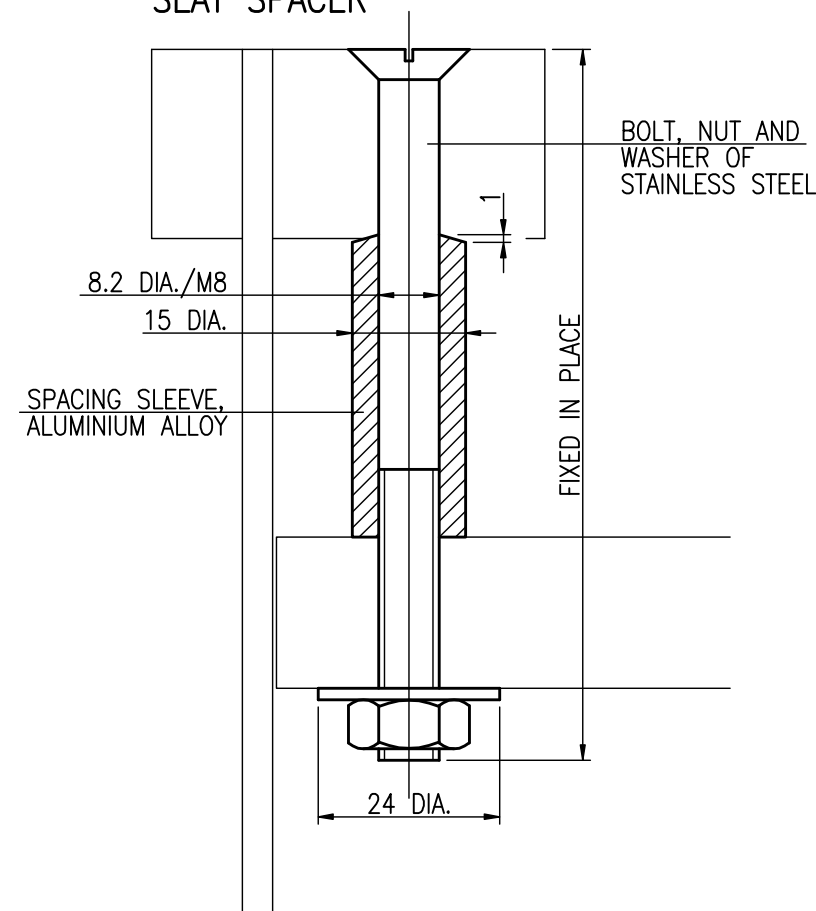

BUILDING STOCK
SCREWED OF 22 mm PARTICLEBOARD
RESAWN INTO 125 mm WIDE PANELS

BOTTOM PANEL SET UP ON THE BUILDING STOCK
AND POSITIONED TO THE AMIDSHIP, THEN TEMPORARILY
FASTENED WITH FOUR NAILS TO STOCK BEAMS